

COEX™ C3000 4K LE IP PTZ Camera Station

The COEX™ C3000 4K LE IP PTZ Camera Station has a unique compact and lightweight design developed specifically for hazardous-area applications. C3000 camera stations are designed for both toughness and durability as demanded for operation in the most adverse of environments.



COEX C3000 hazardous-area camera stations operate in the most extreme environments worldwide. Designed for toughness, durability, and certified to perform in ambient temperatures from -55°C to +70°C without compromise, they are ideal for oil and gas, marine, and industrial installations.

This advanced camera station combines 4K video with a 22x optical zoom to deliver high-quality image and detail capture.

COEX camera stations are compatible with a variety of VMS platforms through ONVIF Profile S, G and T compliance.

Options

- Integral wiper
- COEX FEWS3 wash systems
- Continuous rotation
- IR lamp^{*1}
- Video analytics^{*9}



Specifications

CERTIFICATIONS / RATINGS ⁷		[OPTIONS]
ATEX / IECEx / UKCA	ATEX II 2GD, Ex db IIB/IIC Gb; Ex tb IIIC Db; T4 / T5 / T6 EN60079-0, EN60079-1, EN60079-31, IEC60079-0, IEC60079-1, IEC60079-31	
ATEX / IECEx / UKCA Certified Temperature	-55°C to +40°C (T6), +50/60°C (T5), +70°C (T4)	
CSAus Class / Division	Class I, Div 1, Groups A, B, C, D; Class II, Div I, Groups E, F, G; T4 / T5 / T6	
CSAus Class / Zone	Class I, Zone 1, AEx db IIC Gb; Zone 21, AEx tb IIIC Db; T4 / T5 / T6	
CSAus Standards	FM3600, FM3615, FM3616, UL50, UL50E, UL62368-1 UL60079-0, UL60079-1, UL60079-31	
CSAus Certified Temperature	-55°C to +40°C (T6), +50/55/60°C (T5), +70°C (T4)	
CSA	Ex db IIC Gb; Ex tb IIIC Db; T4 / T5 / T6	
CSA Standards	C22.2 No. 0, C22.2 No. 60079-0, C22.2 No. 60079-1 C22.2 No. 60079-31, C22.2 No. 62368-1, IEC60529 C22.2 No. 94.1, C22.2 No. 94.2	
CSA Certified Temperature	-55°C to +40°C (T6), +50/60°C (T5), +70°C (T4)	
EMC (US & Can.)	FCC CFR47 Part 15 Class A ICES-003 Class A	
EMC	EN61000-6-2, EN 61000-6-4 Class A limits	
CE / UKCA	IEC62368-1, IEC60825-1	
DNV	TAA00001M2 Iss 3	
INMETRO	BRA 21.GE0018X	
ENVIRONMENTAL		
Operating Temperature	-45°C to +70°C / -49°F to +158°F	
Storage Temperature	-45°C to +80°C / -49°F to +176°F	
Ingress Protection	IP66 & IP68 (30m Submersion for 4 hrs) to IEC60529, Type 6 Enclosure	
Salt Mist	IEC60068-2-52 & IEC60945 Section 8.12	
Vibration	0.7g to IEC60068-2-6 & IEC60945	
Wind Loading	Operational to 130 km/h, survival to 268 km/h	
MECHANICAL		
Material	Electro-polished 316L stainless steel	
Window	4K grade toughened glass, thermostatically operated demister [Wiper ²]	
Pan Turning Circle	Ø 560 mm / 22.05"	
Tilt Turning Circle	Ø 360 mm / 14.17"	
Mounting Orientation	Upright or inverted	
Mounting Base	4 x M8 tapped holes, equispaced on a 4" (101.6 mm) P.C.D.	
Dimensions ^{*1} (W x D x H)	375 x 310 x 352 mm / 14.76" x 12.21" x 13.86"	
Weight ^{*1}	27 kg / 59.5 lbs	
Cable Gland Entries ^{*3}	2 x M20	
ELECTRICAL		
Input Power Options	24 V AC/DC (±10%) 50/60 Hz	
Power Consumption ^{*1}	11 VA Quiescent	
	71 VA Operating	
	84 VA Operating (with heater)	
	100 VA Max	
Wash Control ^{*1/4}	24 V AC/DC (0.75 A max) switched output	
Auxiliary Inputs ^{*3}	[1 x contact closure input]	
Relay Outputs ^{*3}	1 x volt free switched output (24 V 0.75 A max)	
Audio ^{*3}	[Line Input/Output]	

CAMERA OPERATION	362° Rotation	Continuous Rotation
Pan Operation	0° to 42°/sec, mechanical limits, programmable soft-stops, preset positioning	0° to 42°/sec, programmable soft-stops, preset positioning
Tilt Operation	180° Rotation, 0° to 21°/sec, mechanical limits, programmable soft stops, preset positioning	
Preset Memory	128 user programmable preset positions (pan, tilt, zoom)	
Preset Accuracy	<0.05°	
Wash/Wipe ^{*1}	[Optional wash/wipe with auto-wiper off]	
ONVIF Control Features	PTZ control, focus control, preset store/recall, auxiliary controls (wash/wipe/lamps)	
	Imaging settings	
	[Alarm input]	
	Relay outputs	
IR Lamp Control ^{*1}	Manual/auto control of a connected IR lamp	
	Manual control of IR focus compensation	
IR Focus Compensation ^{*1}	Manual control of IR focus compensation	
Video Analytics ^{*9}	Abandoned object, intrusion detection, camera sabotage, wrong direction, loitering detection, object counting, object removal, stopped vehicle	
Video Motion Detection	Variable sensitivity and area masking	
Event Notification	HTTP / FTP / SMTP	
Audio Detection ^{*3}	Variable detection level and time interval	
Local Recording ^{*8}	Direct to SD card	
	Synectics Intelligent Edge Recording (SIER)	

DAY/NIGHT CAMERA / LENS		
Image Sensor	1/1.8" Progressive CMOS sensor	
Signal System	4K 2160p 25/30 fps	
	FHD 1080p 25/30/50/60 fps	
Effective Pixels	3856 (H) x 2180 (V), Approximately 8 megapixels	
Zoom Range	22x optical zoom	
	(up to 220x with digital zoom)	
Focal Length/Aperture	6.4 mm (wide) to 138.5 mm (tele), F1.5 to F3.4	
Angle of View (H)	62.1° (wide) to 3.5° (tele)	
Minimum Illumination (Colour)	0.122 lux	
Minimum Illumination (Mono)	0.006 lux	
Wide Dynamic Range	True WDR (120 dB)	
Electronic Shutter	Auto (1/1 to 1/10,000 s)	
Noise Reduction	3D, 2D, colour	
Features	Digital zoom, auto/manual focus, auto/manual iris, auto/manual day/night mode with IR cut filter remove (ICR), auto/manual exposure, automatic gain control (AGC), auto/manual white balance (AWB), backlight compensation (BLC), auto slow shutter, manual sharpness/contrast/saturation/hue, manual exposure compensation, image tamper alarm, image rotation	


VIDEO ENCODING		
Compression Standards	H.264 (MPEG4 part 10/AVC) high and main profiles	
	H.265 (MPEG-H part 2/HEVC), MJPEG	
Bitrate Mode	Constant Bitrate (CBR), Variable Bitrate (VBR), Low Bitrate (LBR)	
Encoding Capability	Up to 4 independently configurable encoded video streams	
Stream Bitrate ^{*6}	64 kb/s to 20.48 Mb/s	
Image Resolution ^{*6}	Stream 1: UHD (3840 x 2160), QHD+ (3200 x 1800), 1080p (1920 x 1080), SXGA (1280 x 1024), 720p (1280 x 720) Stream 2/3/4 additional resolutions: XGA (1024 x 768), SVGA (800 x 600), D1 (720 x 480), VGA (640 x 480), (352 x 240), (320 x 240)	
Image Rate ^{*6}	4K (1 to 30), HD (1 to 60) IPS	
GOP Structure	Variable	
Region of Interest	Ability to crop a selected area of the image source for encoding.	
	Option to increase/decrease encode quality of configurable image regions.	

AUDIO ENCODING ^{*3}		
Compression Standards	uLAW, ALAW, AAC, PCM	
Stream Bitrate	16 Kbps, 24 Kbps, 32 Kbps, 40 Kbps, uLAW (64 Kbps), ALAW (64 Kbps), AAC (128 Kbps), PCM (128 Kbps), PCM (256 Kbps), PCM (384 Kbps), and PCM (768 Kbps)	

NETWORK DEVICE	
Interface Options ^{*5}	Ethernet (100Base-T, 10-Base-T), Auto duplex, Auto/10/100
Protocols	IPv4/v6, TCP/IP, UDP, ICMP, ARP, DHCP, DNS, DDNS, HTTP, HTTPS, NTP, RTSP/RTP, IGMP, SNMP, TLS, PPPoE, QoS, UPnP, SMTP, FTP
Control Protocol ^{*8}	SYNX-HD, ONVIF (Profile S, G, T compliant)
Video Stream Delivery	RTSP/RTP (Unicast: UDP/TCP, Multicast UDP)
Network Discovery	SYNX-HD, WS-Discovery (ONVIF)
Device Security	Permission based password protected web interface and ONVIF/RTSP services, HTTPS support, HTTP disable, IP filter, IEEE 802.1x
Supported Internet Browsers	Microsoft Internet Explorer 11.0 or later / Mozilla Firefox / Google Chrome / Apple Safari
System Maintenance	Field upgradeable firmware, diagnostic logs

NOTE: *1 Dependent on certification and equipment fitted. *2 Wipers are consumable items that need regular replacement. Please refer to the manual for recommendations and maintenance. *3 Dependent on cable tail option. *4 Maximum permissible resolution, bitrate and framerate per additional stream will be reduced dependent on the configuration of the primary stream. *5 Exact certification requirements must be specified at the time of order. *6 Maximum permissible resolution, bitrate and framerate per additional stream will be reduced dependent on the configuration of the primary stream. MJPEG limited to HD resolution. *7 Exact certification requirements must be specified at the time of order. *8 A supported SD memory card is required for profile G, please refer to the manual for recommendations. *9 Video analytics feature requires a separate license. Use of video analytics may require a reduced ambient temperature range.

PART CODE STRUCTURE

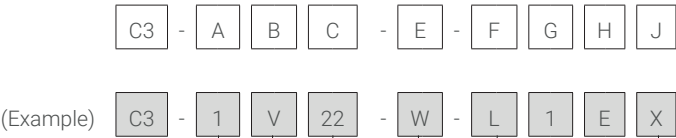

A - CAMERA HOUSING SIZE

1 Size 1 camera housing

B - FIXED/PTZ

C PTZ - Continuous pan

V PTZ - Non-continuous pan

C - DAY/NIGHT CAMERA

22 4K UHD, 22x zoom

E - WIPER

Without wiper

J - SPECIAL

Standard build

X Special build

H - OUTPUT TRANSMISSION TYPE

E Ethernet Base-T

G - BASE/MOUNTING TYPE

1 Standard PTZ mounting

F - TECHNOLOGY SERIES

L LE Series, IP encoder